

产品信息

带数控工作台的光学-触觉设备 Mar4D PLQ 4200-T3 (Z=730/50 kg)

产品特性

Speed:

Extremely fast, mechanical-optical workpiece alignment by means of a fully automatic centering and tilting table in combination with the matrix camera

Axis movements with a unique speed of up to 200 mm/s

Very fast and high-resolution matrix camera with a large field of view of 15x10 mm (WxH) in effective combination with innovative probe systems

Mahr T7W with motorized axis of rotation and thus fastest stylus change on the market or RENISHAW SP25M 3D scanning probe system

Joint evaluation of all collected measurement data via MarWin

Productivity:

Workpieces that were not manufactured between tips are simply clamped in the chuck

Many different measuring functions combined in one device

Flexible workpieces with up to D=210 mm, L=730 mm and 50 kg measured directly in production next to the production machines

Increased measuring capacities and reduced waiting time

Precision:

Compensation of eccentrics of several millimeters to 1 μ m in less than 30 seconds


Integrated environmental controls, such as active temperature compensation of the device, ensure consistent measurement quality and significantly reduce waste

User-friendliness:

The ergonomic housing and interior design enables convenient and gentle operation for many hours

Light curtains and interior monitoring protect people and measuring devices

All devices are "robot-ready" and automation solutions, such as robot loading, can be implemented quickly and directly via our specialized MES department

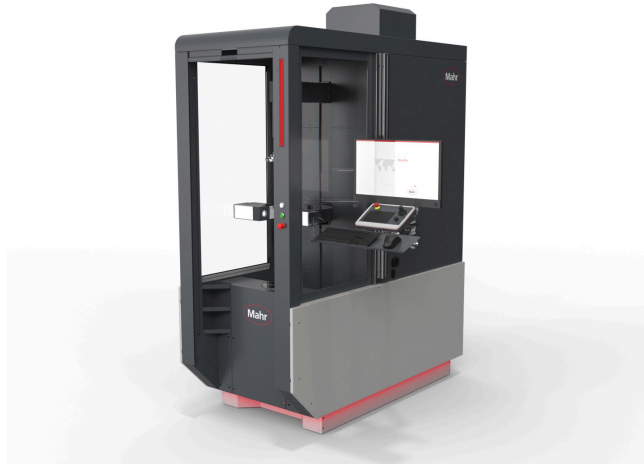

物品号: 5554253

技术数据

Travel/measuring path X1 axis	200 mm
Travel/measuring path X2 axis	200 mm
Travel/measuring path Y-axis	40 mm
Pos.-/Meas. path Z-axis	730 mm
Positioning speed C-axis	0.2 - 15 1/min
Positioning speed X1 axis	0.5 - 200 mm/s
Positioning speed X2 axis	0.5 - 200 mm/s
Positioning speed Y-axis	0.5 - 50 mm/s
Positioning speed Z-axis	0.5 - 200 mm/s
Workpiece length max.	730 mm
Workpiece diameter max.	210 mm
Table load max.	50 kg
Error limit Length	MPE \leq (2.4 + l/200) μ m; 'l' in mm
Error limit diameter	MPE \leq (1.3 + d/150) μ m; 'd' in mm
Measured value resolution Length	0.01 - 0.0001 mm
Measured value resolution diameter	0.01 - 0.0001 mm
Angular resolution	0.01 - 0.0001 $^{\circ}$
工作温度	20 $^{\circ}$ C
Sensors	optical tactile
Optical system	telecentric precision optics, image field approx. 15 x 10 mm (W x H)
Camera system	CMOS matrix camera
测头系统类型	Mahr T7W and/or RENISHAW SP25M
Special equipment	CNC table
Measuring computer	AIO PC or industrial AIO PC with UPS (each incl. Microsoft Windows 10 IoT LTSC)
操作温度	10 $^{\circ}$ C 到 35 $^{\circ}$ C
存储和运输温度	5 $^{\circ}$ C 到 60 $^{\circ}$ C
Sound pressure level	<75 dB(A)
湿度 (文本)	max. 70 %; non-condensing
Mains voltage	90 # 240 V
Mains frequency	50/60 Hz
电源消耗	850 W
Transportation options	suitable for air freight
随附	PC holder